

**CONVINcE**

**D1.2.3**

**Business Cases for IPTV and OTT**

with NGPoP solution

**Editor: Kinga Pilarska (Orange)**

**Reviewers: Raoul Monnier (TVN)**

**Authors: Kinga Pilarska (Orange)**

**Bernard Liau (Orange)**

**Nancy Perrot (Orange)**

**Jerome Bardon (TVN)**

**Rickard Ljung (Sony Mobile)**

**Kagan Bakanoglu (Vestel)**

**Martti Forsell (VTT)**

## 1 EXECUTIVE SUMMARY

The purpose of the deliverable is to provide an analysis of the energy consumption savings obtained by introducing CONVINCe research results, comparing the State Of The Art (SOTA) reference scenario with the scenarios studied by the project: Edge Cloud, Software Defined Networks, (SDN), Network Functions Virtualization (NFV) and Content Delivery Network (CDN). This should allow positioning quantitatively possible savings in the End-to-End (E2E) chain, including the service supplier and the customer.

In this third study, the analysis focuses on the IPTV and OTT service, which is becoming more and more popular. OTT services are more energy consuming than IPTV. We define the "average hour of video" as the reference unit for supporting costs. Thus, the key performance indicator is the average consumption of energy for one hour of IPTV and OTT. We then evaluate for the European market what represent in economic terms the energy savings that should be realized by implementing the project results.

We use a top-down approach, analysing globally the impact of the project results on the various consumption elements (headend, network and terminal). The network include cloud architecture base on Next Generation Point of Presence (NGPoP) solution.

Savings that could be obtained by the CONVINCe project for IPTV and OTT service remain small at the European level. We can obtain an order of magnitude of some hundreds of millions of Euros savings per year in Europe. In regards to the energy expenses of all participants (video service sellers and users) we obtained 83M€ for IPTV and 617M€ for OTT savings. However, at the level of the service, it represents about 13% for IPTV and 14% for OTT savings for the delivery of the service which is not negligible.

The energy consumption for IPTV and OTT service is a small portion of the total energy that operators use in their networks. But nowadays is very hard to reach spectacular savings. Operators are looking for even small cost cutting opportunities.

# Table of Contents

- 1 Executive Summary ..... 2
- 2 Document history and abbreviations ..... 5
  - 2.1 Document history ..... 5
  - 2.2 Abbreviations ..... 5
- 3 Introduction and presentation of the approach ..... 7
  - 3.1 IPTV and OTT ..... 8
- 4 Energy consumption models in reference scenario (sota) ..... 9
  - 4.1 Simplified end to end architecture for IPTV and OTT: ..... 9
  - 4.2 Methodology to calculate the energy consumption of an average video in SOTA scenario: 9
  - 4.3 Terminals (including sharing with other services).....10
    - 4.3.1 Smartphones and tablets.....10
    - 4.3.2 Personal computers ..... 11
    - 4.3.3 Set-Top Boxes ..... 11
    - 4.3.4 TV sets ..... 11
    - 4.3.5 Average consumption per terminal ..... 11
  - 4.4 Network ..... 12
  - 4.5 Headend..... 13
- 5 Dedicated architecture for on demand video service ..... 14
  - 5.1 Proposed improvements (new architecture) ..... 14
    - 5.1.1 Terminals ..... 15
    - 5.1.2 Network ..... 15
    - 5.1.3 Headend ..... 15
  - 5.2 Evaluation of Convince proposal for terminals ..... 15
  - 5.3 Evaluation of CONVINcE proposal for the network ..... 16
    - 5.3.1 Edge cloud ..... 16
    - 5.3.2 SDN/NFV ..... 17
    - 5.3.3 Content distribution architecture ..... 18
    - 5.3.4 Cumulative improvements for networks ..... 18
  - 5.4 Global evaluation of potential savings ..... 18
    - Table 8 Average consumption of energy of an OTT service with NGPoP..... 19
- 6 Economic model: how to pass from energy to euros ..... 19
  - 6.1 Calculation of forecast of volume of IPTV and OTT per country ..... 19
    - 6.1.1 Consumption of energy in the Edge Cloud. Case for the France ..... 20
  - 6.2 Cost of energy per country ..... 20
    - 6.2.1 Analyse of the impact on the cost of energy (purchase, production and distribution) .. 21
    - 6.2.2 Cumulated savings for all actors within the chain ..... 22
  - 6.3 The project's economic assessment..... 22
- 7 Conclusion ..... 24

# Table of Figures

Figure 1 Architecture model for IPTV and OTT .....	9
Figure 2 - Daily profile of traffic in the IP core network.....	17

# Table of Tables

Table 1 Basic energy consumption for 1 GByte downloaded (target year 2020) .....	13
Table 2 IPTV Total headend consumption .....	14
Table 3 Consumption of headend for a video.....	14
Table 4 Basic energy consumption for 1 GByte downloaded with an edge cloud architecture .....	16
Table 5 Basic energy consumption for 1 GByte downloaded with a SDN/NFV architecture .....	17
Table 6 Basic energy consumption for 1 GByte downloaded when cumulating edge cloud and SDN/NFV architectures.....	18
Table 7 Average consumption of energy of an IPTV service with NGPoP.....	19
Table 8 Average consumption of energy of an OTT service with NGPoP .....	19
Table 9 Elements of calculation of number of IPTV and OTT per country .....	20
Table 10 Volume and power consumption of the IPTV and OTT stored in the cloud .....	20
Table 11 Economic savings in terms of costs of energy and supply for IPTV .....	21
Table 12 Economic savings in terms of costs of energy and supply for OTT .....	22
Table 13 The total savings in terms of fee for energy for IPTV per year (energy and euro) .....	23
Table 14 The total savings in terms of fee for energy for OTT per year (energy and euro) .....	23

## 2 DOCUMENT HISTORY AND ABBREVIATIONS

### 2.1 Document history

Version	Date	Description of the modifications
0.0	01/05/2017	Table of content
0.1	30/08/2017	Completed by NGPoP and GLB results for IPTV and OTT
1.0	31/08/2017	Final version

### 2.2 Abbreviations

CPU	Central Processing Unit
DSLAM	Digital Subscriber Line Access Multiplexer
E2E	End to End
EPC	Evolved Packet Core
GB	GigaByte
GE	Gigabit Ethernet
GLB	Geographical Load Balancing
GPU	Graphics Processing Unit
HD	High Definition
IP	Internet Protocol
IPTV	Internet Protocol Television
MPLS	Multiprotocol Label Switching
IPTV	Internet Protocol Television
LTE	Long Term Evolution
Mbps	Mega bit pre second
MPEG-DASH	Dynamic Adaptive Streaming over HTTP
MSAN	multiservice access node
NGPoP	Next Generation Point of Presence
OTT	Over The Top technology
PC	Personal Computer
SD	Standard Definition
SDN/NFV	Software Defined Networking/Network Functions Virtualization
SM	Smartphone
SOTA	State of the Art
STB	Set-Top Boxe

TV	Television
VPN	Virtual Private Network
W	Watt - a unit power in the International System of Units (SI)
Wh	Watt per hour

### 3 INTRODUCTION AND PRESENTATION OF THE APPROACH

The purpose of the deliverable is to provide an analysis of the energy consumption savings obtained by introducing CONVINCe research results, comparing State Of The Art (SOTA) reference scenario with scenarios including CONVINCe proposals. This allowed positioning possible savings with the total energy consumption and give relative savings per component of the End-to-End (E2E) chain. The content of D.1.2.1 was thus an economic assessment of the stakes of the project results and a method to calculate the power consumption for the selected video service (IPTV which take only 10% of the video traffic) was developed. In D.1.2.2, the analysis was expanded by OTT services (80% of the traffic), model was modified by savings results for terminals achieved by Convince.

In this deliverable cost model was specify by adding cost of energy using by the cloud. We use Next Generation Point of Presence (NGPoP) solution which hosts in particular the IP edge for all access types (fixed, Wi-Fi, mobile) and distribute content closer to the user at the boundary between aggregation and core networks. It make achieved result more close to the reality because cloud start to be part of the architecture among operators. For the network part we take in to account also Geographical Load Balancing (GLB) solution which provide more savings.

The objective is to give an order of magnitude of the possible savings (not to make mistakes in a ratio of 10!) and to have an idea of the savings relatively to the consumption on the whole chain. Experience on historical cost calculations shows some stability, even if the figures may vary by country depending on the network architecture and the volume of the traffic. By analogy, we conjecture a similar trend for energy consumption.

To reach this objective, we propose to analyze the impacts of the project proposal on a unit of video service (for example, an average downloaded video in the case of a IPTV service and OTT). The idea is to compare incrementally the results of the project with the current scenario (SOTA).

By analogy with studies on costs, we aim at using a top down model. Starting from the observed energy consuming of a unit of video, rebuilt from basic elements of energy consumption, the main steps are:

- 1) To share it on the network elements of the chain, including terminals, network – and typically, for the network<sup>1</sup>: core network, backhaul and access – and headend, cloud
- 2) To analyze globally the impact of the project results on each of these elements,
- 3) To decrease or increase the energy consumption for each one,
- 4) To sum again on the whole chain.

As energy cost deeply depends on the energy tariffs within the country, transformation of kWh into Euro will be done at the end.

The analysis is done for an architecture which is already in place (SOTA or proposed scenarios). Details on transition between the existing scenario (SOTA) towards proposed ones is not part of this work.

In this third version of the study, we focus on two services: IPTV and OTT with NGPoP.

One of the difficulties of the exercise is to define the perimeter of the analysis:

- What size for the network: country wide, European wide, worldwide?
- What topology?
- Supporting which services (network elements are always shared among a lot of services)?

To avoid this difficulty, we reduce the problem to a unit of service supposed to support the consumption of energy. From the experience at Orange in calculating cost of gigabyte of data in the European affiliates of the Orange group - which have certain stability despite the differences in scale, network architecture or customer usages - we assumed the same stability applies to energy consumption in the network supporting the same units of traffic- at least in the same proportions. Thus, we suppose that the resulting consumption of energy is quite stable for European countries (we attempt to give bounds). The calculations are based on energy consumption of basic elements including implicitly network topology, engineering rules, sharing with other services (for example by using an average energy consumption to download a gigabyte of data in the core network). The

---

<sup>1</sup> We use aggregated model of energy consumption by element of the chain: for example for the national wide core IP/MPLS network calculation could be based on the energy consumption to download one gigabyte of data, idem for aggregation and access networks, including the contribution of all layers below IP (WDM).

assumption is that these basic consumption figures have the same order of magnitude, independently of the size and topology of the network. As the considered figures correspond to the network of a specific operator, we aim to have a precision lower than a ratio 10.

### 3.1 IPTV and OTT

For IPTV and OTT, we define an average video by its duration, and by its average volume in terms of downloaded data (in Giga Byte). The calculations take the form below, where items in italic characters are assumed to be data observed from measurements.

$$\text{VolumeVideo [GB]} = \text{VolumeVideoTV [GB]} * \text{percentTV} + \text{VolumeVideoPC [GB]} * \text{percentPC} + \text{VolumeVideoSM [GB]} * \text{percentSM}$$

Where

*VolumeVideoXX [GB]* represent the volume in Gigabyte of an average video on terminal *XX* [*XX*: TV set (*TV*), personal computer (*PC*) or smartphone or tablet (*SM*)]  
*percentXX [GB]* is the frequency of usage by customers.

Note that:  $\text{percentTV} + \text{percentPC} + \text{percentSM} = 100\%$

The average duration of a video may also depend on the terminal:

- *DurationVideoTV[hour]* for TV sets,
- *DurationVideoPC[hour]* for personal computers,
- *DurationVideoSM[hour]* for smartphones and tablets.

$$\text{DurationVideo[hour]} = \text{DurationVideoTV[hour]} * \text{percentTV} + \text{DurationVideoPC[hour]} * \text{percentPC} + \text{DurationVideoSM[hour]} * \text{percentSM}$$

We suppose *VolumeVideoXX*, *BitrateVideoXX* and *percentXX* are the available input data.

In the following calculations, we make the following assumptions for IPTV and OTT. It reflects practical usage experience.

$$\begin{aligned} \text{VolumeVideoTV[GB]} &= 1 \\ \text{VolumeVideoPC[GB]} &= 0,5 \\ \text{VolumeVideoSM[GB]} &= 0,25 \end{aligned}$$

$$\begin{aligned} \text{DurationVideoTV[hour]} &= 1 \\ \text{DurationVideoPC[hour]} &= 0,5 \\ \text{DurationVideoSM[hour]} &= 0,25 \end{aligned}$$

In OTT we take in to account way of watching free YouTube videos, that why for IPTV and OTT we take different percentage of usage.

For IPTV:

$$\begin{aligned} \text{percentTV} &= 50\% \\ \text{percentPC} &= 25\% \\ \text{percentSM} &= 25\% \end{aligned}$$

For OTT:

$$\begin{aligned} \text{percentTV} &= 20\% \\ \text{percentPC} &= 45\% \\ \text{percentSM} &= 35\% \end{aligned}$$

We thus obtain for an average video:

IPTV



OTT	DurationVideo[hour] = 0.7
	VolumeVideo[GB] = 0.7
	DurationVideo[hour] = 0.5
	VolumeVideo[GB] = 0.5

## 4 ENERGY CONSUMPTION MODELS IN REFERENCE SCENARIO (SOTA)

### 4.1 Simplified end to end architecture for IPTV and OTT:


The analysis is based on the simplified reference architecture (Figure 1), mainly:

- Headend located within the video data center,
- Network composed of an IP-based national core network,
- Fiber IP/GE aggregation network,
- Wireless and wired accesses,
- Terminals.

At head-end, videos for IPTV service are generally only coded once in a format HQ. For OTT videos, on the contrary, many formats are encoded (until 150) adapted to each kind of terminals.

In practice, videos are downloaded via two access networks, fixed and mobile, on different kinds of terminals (some of them reached by both types of accesses).

For OTT video, the IP core network is the Internet network carrying the data traffic from the Internet (unmanaged IP network). For IPTV, the core network is a specific network (dedicated to traffic in connected mode) that provides a level of traffic protection and a level of quality of service higher than in the IP transport network of the Internet. This network generally overlaps the IP transport network (directly used to carry Internet traffic) over which it is created; it is based on VPN dedicated to the connected mode traffic involving VPN routers, it is operated with traffic engineering different from those operating the IP network in background.

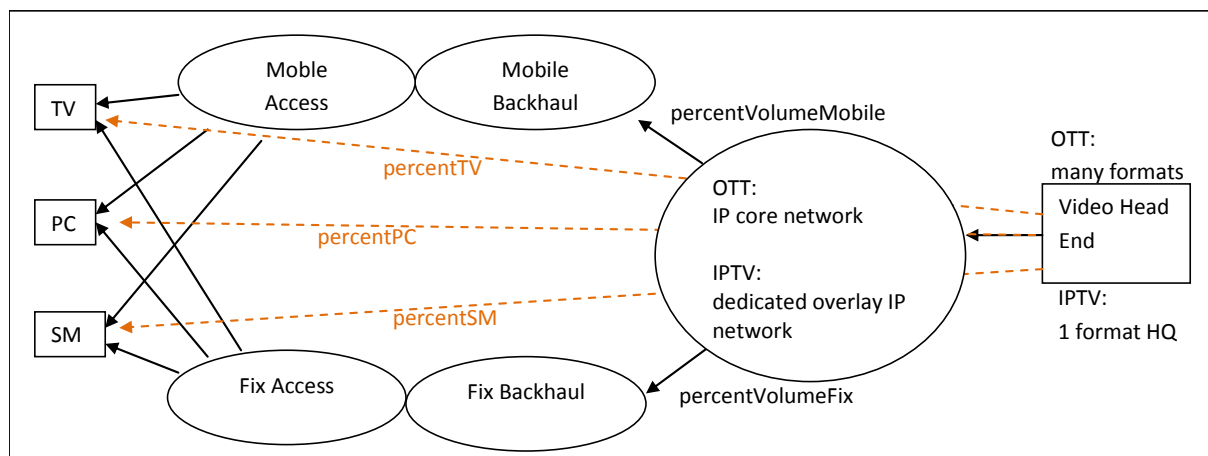

**Figure 1 Architecture model for IPTV and OTT**

### 4.2 Methodology to calculate the energy consumption of an average video in SOTA scenario:

The average consumption of a video is calculated from the average consumption in the different elements of the end to end chain (headend, network, terminals). The calculation method differs according to these elements. For the network elements, it depends on consumption units related to volume of downloaded data (in networks, costs are typically supported by gigabytes of data and

minutes of voice). The calculation is thus carried out from the average consumption to download a gigabyte of data, weighted by the usage to download a video (which may differ for IPTV and OTT video). For terminals and headends it depends on consumption units related to durations of use (one hour of video seems the most natural unit to compare different technologies of terminals). For the various network elements, the calculation is thus carried out from the average consumption to download a gigabyte of data, weighted by the usage to download a video. For the terminals and headends, the calculation is carried out from the average consumption of processing one hour of video.

$$\text{ConsoVideo [Wh]} = \text{VolumeVideo [GB]} * \text{Conso1GBNetwork} \left[ \frac{\text{Wh}}{\text{GB}} \right] + \text{Conso1hourTerminal[Wh]} * \text{DurationVideo [hour]} + \text{Conso1hourHeadEnd [Wh]} * \text{DurationVideo[hour]}$$

$$\begin{aligned} \text{Conso1hourTerminal [Wh]} &= \text{Conso1hourTV [Wh/hour]} * \text{durationVideoTV[hour]} * \text{percentTV} \\ &+ \text{Conso1hourPC [Wh/hour]} * \text{durationVideoPC[hour]} * \text{percentPC} \\ &+ \text{Conso1hourSM [Wh/GB]} * \text{durationVideoSM[hour]} * \text{percentSM} \end{aligned}$$

Where *VolumeVideo* is the average volume of a video downloaded by all kind of terminals given in section 3.1.

Basic energy consumptions of the elements of the chain (Conso1hourXX, Conso1GBNetwork and Conso1GBHeadend) are made explicit respectively in subsections 4.3, 4.4 and 4.5).

### 4.3 Terminals (including sharing with other services)

#### 4.3.1 Smartphones and tablets

A smartphone or a tablet is usually used for a large amount of use cases. Hence, such terminals have an average power consumption even when it is not used for video services. We denote this power consumption as "background consumption". This background consumption could be the result of using the terminal for voice calls, messaging, social networking, gaming, web browsing etc. However, on top of the background consumption we consider here specifically the usage of smartphones and tablets for video usage.

For downloading a video on mobile terminals we consider the data to be delivered either over a cellular network (e.g. LTE) or local area network (WiFi). The available data rates over the radio interface for these network types are typically in the same order of magnitude, e.g. ~100Mbps. However, the available data rate of a single mobile phone at a given time slot could be different, depending, among others, on the radio environment and on the radio access load. The video download can utilize a dynamic rate selection protocol, e.g. MPEG-DASH to adapt the selected media data rate / quality to the available link data rate. Codec H265 and H264 are typically used for video, where the h.265 codec needs in the order of 50% less data than H264 for the same video quality.

Within CONVINcE state of the art, we consider different power consumptions for smartphones and tablets respectively, mainly due to larger average display sizes of tablets. We can consider the consumptions of energy to incrementally process one hour video, on top of the background consumption for a smartphone or a tablet, are:

$$\begin{aligned} \text{Conso1hourSmartPhone[Wh]} &= 1.23 \\ \text{Conso1hourTablet[Wh]} &= 3.5 \end{aligned}$$

Assuming a penetration ratio between smartphones and tablets of 25% for video we obtain (for the sake of simplicity we assumed the same ration for IPTV and OTT):

$$\text{Conso1hourSM[Wh]} = 1.8$$

Note that the capacity of a Smartphone battery is about 11 Wh<sup>2</sup>. This means that a smartphone when watching video works during 9 hours (simply by dividing 11 Wh by 1.23 W), which corresponds to the experience of everyone.

### 4.3.2 Personal computers

The power consumption of PCs differs a lot, based on hardware specifications such as CPU, GPU, screen technology and size, hard disk drive, etc. However, we can here typically focus on a state of the art laptop, targeting mainstream performance. Similar as for smartphones and tablets, the average usage is widespread on many different use cases besides video usage. We here consider the additional power consumption on top of such background usage. Basic consumption of energy to incrementally process 1 hour video on a PC supposed to be already connected is assumed to be:

$$\text{Conso1hourPC[Wh]} = 27$$

### 4.3.3 Set-Top Boxes

Just like other terminals, the power consumption of the Set-Top Boxe (STB) varies depending on the CPU, GPU and other parameters of the hardware used. In this project, a specific terminal is used as reference STB which is equipped with a Broadcom 7250 chipset. The average power consumption can be assumed to be 30 Wh.

Analyses made by Orange reveals that a given number of customers (15%) do not switch off their STB after watching TV. The STB is set in sleeping mode. The consumption is then reduced to 3 Wh (10% of the consumption in activity). For these STB, we only count the incremental cost of activity, let say 27 Wh. The final figure is hence given by:

$$\text{Conso1hourSTP[Wh]} = 29.6$$

### 4.3.4 TV sets

The consumption of TV sets (the terminal is supposed to be on at the beginning of the video and off at the end) to process 1 hour video is:

$$\begin{aligned} \text{Conso1hourTV [Wh]} &= 63 \text{ for HD 40" TV Sets} \\ \text{Conso1hourTV [Wh]} &= 93 \text{ for 4K HEVC 40" TV Sets} \end{aligned}$$

We propose the following sharing: 67% for HD 40" TV Sets and 33% for 4K HEVC 40" TV Sets. The average energy consumption is thus:

$$\text{Conso1hourTV [Wh]} = 72.9$$

### 4.3.5 Average consumption per terminal

The average consumption of terminals can be easily calculated from the average usage in time (see formula in section 4.2):

$$\begin{aligned} \text{IPTV:} & \\ & \text{Conso1hourTerminal[Wh]} = 77 \\ \text{OTT:} & \\ & \text{Conso1hourTerminal[Wh]} = 52.1 \end{aligned}$$

And for an average video:

$$\begin{aligned} \text{IPTV:} & \\ & \text{ConsoVideoTerminal[Wh]} = 52.9 \\ \text{OTT:} & \end{aligned}$$

---

<sup>2</sup> A typical smartphone battery size is centered around ~3Ah which corresponds to ~11Wh.

$$\text{ConsoVideoTerminal[Wh]} = 26.7$$

#### 4.4 Network

For the analysis of energy consumption, the network has been divided into macro elements compatible with the block diagram of Figure 1.

For mobile networks:

- Radio access network (including 3GPP macro and micro cells, WiFi),
- Mobile backhaul,
- Mobile core platforms (EPC).

For the wired networks:

- Copper and optical local loop,
- DSLAM, MSAN access equipment for data services,
- Backhaul (based on GE routers and fiber).

IP core transport network is common to both wired and wireless networks.

$$\begin{aligned} \text{Conso1GBNetwork} \left[ \frac{\text{kWh}}{\text{GB}} \right] &= \text{Conso1GBCoreIP} \left[ \frac{\text{Wh}}{\text{GB}} \right] \\ &+ \left( \text{Conso1GBMobileBackhaul} \left[ \frac{\text{Wh}}{\text{GB}} \right] + \text{Conso1GBMobileAcces} \left[ \frac{\text{Wh}}{\text{GB}} \right] \right) * \text{percentVolumeMobile} \\ &+ \left( \text{Conso1GBFixBackhaul} \left[ \frac{\text{Wh}}{\text{GB}} \right] + \text{Conso1GBFixAccess} \left[ \frac{\text{Wh}}{\text{GB}} \right] \right) * \text{percentVolumeFix} \end{aligned}$$

Where:

- *Conso1GBXX* defines the energy consumption to download one Gbyte of data in the network element XX (XX = Core IP, Mobile access and backhaul, Fixed [wired] access and backhaul) (values are given in column "energy consumption to download 1 Gbyte" of Table 1),
- *percentVolumeMobile* and *percentVolumeFix* are respectively the percentage of data traffic downloaded by wireless and wired users (respectively 20% and 80%, as it appears in column "percent of concerned traffic" of Table 1).

Energy to carry 1 Gbyte of data was calculated using real measurements in Orange France Network, extrapolated for year 2020. The scope is data networks, including 3G and 4G technology for mobile access network and DSL copper or optical access for the wired network. The equipment dedicated to voice services or legacy data services is not involved. This information is obviously confidential. To give an idea of the distribution of energy consumption in a network among its main elements, the consumptions are given in Table 1 as a percentage of the total consumption. The energy consumption is quite stable during the year. The conclusion to be drawn from these assessments of energy consumption is the trend to stability, regardless of traffic growth (new technologies consume less, which counterbalances the traffic growth).

For every part of the network, the consumption has then been divided by the traffic forecasted during the period. Of course, the traffic volume involved is different for each of the network segments as expressed in column "percent of concerned traffic". Traffic towards wireless users is forecast to represent 20% of the total data traffic (about 10% in 2014, meaning a yearly increase of about 60% for mobile users).

Traffic for IPTV is routed through a VPN overlay network. This network requires additional routers. The traffic engineering and dimensioning rules induce an average usage of the VPN 20% lower than in the IP network systems. We concluded that the consumption for carrying a gigabyte of IPTV requires 20% more energy than the equivalent in the IP network.

To summarize trends, energy consumption of the involved network elements between 2014 and 2020 is forecasted to be relatively constant, including changes in technology and evolution of usage. However, data traffic is sharply increasing during the same period with an overall growth of 40% per year. This means that a large part of the energy consumption is quite independent of the usage and the consumption of energy of a video directly decreases as the number of video increases.

Consumption for 1 Gbyte is given in Table 1, column “energy consumption to download 1 Gbyte”.

network element	variable	energy consumption forecast for 2020 on a basis 100	energy consumption observed in 2014	percent of concerned network traffic	energy consumption to download 1 Gbyte kWh
radio access network 3G and 4G	Conso1GBMobileAccess	32	32	20%	122
mobile packet core and backhaul	Conso1GBMobileBackhaul	8	10	20%	32
fixed access (copper and fiber)and backhaul	Conso1GBFixAccess + Conso1GBFixBackhaul	39	38	80%	37
IP core network	Conso1GBCoreIP for videos from OTT	17	17	90%	13
	Conso1GBCoreIP for videos on demand			10%	16
Cloud	Conso1GB	3	0		2
				100%	

**Table 1 Basic energy consumption for 1 GByte downloaded (target year 2020)**

It should be noted that energy is rather used in the access, particularly for wireless access. The core network represents only 17% of the full network consumption and for cloud (NGPoP solution) 3 % (see column “energy consumption forecast for 2020 on a basis 100”).

Note that for an average Gigabyte of downloaded video network usage is different for IPTV and OTT (IPTV is most often viewed on television sets and therefore relatively uses more fixed access and less mobile access than OTT).

With the given assumptions, using the model above, the energy consumption for one Gigabyte of video is:

IPTV:	Conso1GBNetwork = 76.5 Wh
OTT:	Conso1GBNetwork = 79.6 Wh

The energy consumption in the network for an average video is:

IPTV:	ConsoVideoNetwork = 52.6 Wh
OTT:	ConsoVideoNetwork = 40.8 Wh

## 4.5 Headend

Basic energy consumption models for video headends have been introduced in CONVINCe deliverable D2.1.1. For IPTV and OTT services, we supposed that videos are mainly delivered by IPTV headend.

The model proposed by D2.1.1 and presented in Table 2 calculates an energy consumption per transcoding unit. Fixed costs related to redundant units, management systems, scramblers, etc. represent about 15% of the total headend consumption.

For IPTV:

Taking into account the nature of video channels, a more accurate model is:

$$HEConsumption_{(Wh)} = FixedPartCons_{(Wh)} + (SDChannelCons_{(Wh)} \times NumberOfSDChannels) + (HDChannelCons_{(Wh)} \times NumberOfHDChannels)$$

	Nb units	W/unit	Total W
SD transcoder units (1RU)	20	460	9200
HD transcoder units (1RU)	18	460	8280
Redundant units (1RU)	4	460	1840
Mangement system	1	460	460
CAS	1	200	200
Scramblers	4	140	560
<b>Total consumption (W)</b>			<b>20540</b>

**Table 2 IPTV Total headend consumption**

Finally, considering that we use a single transcoder for a video, we obtain the amount of energy consumption presented in Table 3. The energy consumption is supposed to be quite linear with the time of encoding. For IPTV, only one high quality format is encoded. For OTT, the same video is transcoded several times to have versions corresponding to the various kinds of terminals (typically 150 versions for the same video). Considering that a video is watched by a certain number of users, we obtain the average consumption of energy related to a video usage by customer.

We note that this consumption is negligible compared with network and terminals consumptions.

consumption for coding 1 hour video	541 Wh
<b>Video on demand</b>	
consumption for coding 1 average video	372 Wh
number of versions coded for a single video	1
average popularity of a video on demand	100 000 users
consumption for 1 hour video per user	0,005 Wh
consumption for 1 video per user	0,004 Wh
<b>Video OTT</b>	
consumption for 1 average video	197 Wh
<b>SOTA or storing several copy in the edge cloud</b>	
number of versions coded for a single video	150
average popularity of a video on demand	500 000 users
consumption for 1 hour video per user	0,162 Wh
consumption for 1 video per user	0,059 Wh

**Table 3 Consumption of headend for a video**

## 5 DEDICATED ARCHITECTURE FOR ON DEMAND VIDEO SERVICE

### 5.1 Proposed improvements (new architecture)

In this section, we attempt to describe the main impact of the proposed architecture and proposition of CONVINCe for the energy consumption of a IPTV and for a OTT service.

### 5.1.1 Terminals

The energy consumption savings analyzed within the CONVINCe project for terminals are being conducted within CONVINCe WP4, including, for instance, more efficient utilization of the wireless radio interface in the communication between network and terminals.

WP4 studies [Refer to D4.2.1] show that the reduction of power consumption for video usage over a cellular radio access network such as LTE could be achieved by a collaborative architecture sharing information between terminals and the mobile access network. The savings on total terminal energy consumption level are for this study typically in the order of 5% (smartphones and tablets).

For the fixed terminals, namely the PCs, STBs and TV Sets, not only power consumption in the radio interface but also the decoders on the hardware and the screens are two major components responsible for power consumption. Furthermore, the effective usage of the operating modes is one of the factors of reducing the average power consumption. Overall, the achieved power consumption reduction in PCs are from 43% up to 65%, STBs are about 10% and in the TV Sets are about 15%.

### 5.1.2 Network

Three scenarios of network evolution have been proposed in CONVINCe project (see Deliverable D1.1.1 - *Application Scenarios*), namely an edge cloud based architecture, a SDN/NFV based architecture and a content distribution architecture.

We explain below what brings each scenario in terms of energy savings for an IPTV and an OTT service.

- Edge cloud allows storing contents nearby the user, saving capacity of transport in the IP/MPLS core network. For the IPTV and the OTT service, the edge cloud architecture should allow saving capacity (and thus energy consumption) within the core IP and backhaul networks by downloading fewer videos.
- SDN/NFV allows switching on/off routers according to the volume of traffic to download. There is thus a possible saving in IP/MPLS core network, during the off-peak hours. This architecture is expected to optimize network resources and could allow switching off the under-loaded routers (or interfaces) in the core network. GLB for SDN. It developed and detailed in D3.3.2 - Design of energy efficient CDN (including data centers and cloud).
- Content distribution architecture: for the IPTV and the OTT service the impact is supposed to be similar to edge cloud (same storage function closer to users of the most requested data)

### 5.1.3 Headend

For the IPTV and the OTT service, the consumption of energy is very small compared to the other elements of the chain, so we have not analyzed here, for this service, the impact of possible improvement proposed by WP2 (Power saving in the headend). It is intended to take into account in further studies the influence of the headend in the end to end consumption

## 5.2 Evaluation of Convince proposal for terminals

For the business case analysis, we estimate that the potential savings due to mobile terminals and PCs could be in the order of 5% - 65%, 10% for STB and 15% for TV sets, considering the total terminal average power consumption during active video usage.

The energy consumption for an average hour of video becomes:

IPTV: Conso1hourTerminal = 63.9 Wh
OTT: Conso1hourTerminal = 39 Wh

The energy consumption due to terminal for an average video is:

IPTV: ConsoVideoTerminal = 43.9 Wh.
--

OTT:

ConsoVideoTerminal = 20 Wh.

### 5.3 Evaluation of CONVINcE proposal for the network

#### 5.3.1 Edge cloud

The edge cloud architecture allows storing contents nearby the user and consequently decreases the data traffic in the IP/MPLS core IP network. For IPTV service, the edge cloud architecture should allow saving capacity (and thus energy consumption) within the core IP and backhaul networks by downloading fewer videos.

The decrease of traffic volume depends on several factors, among them the popularity of the requested contents, the possibility to catch and store them, and the performance of the caching algorithms. In practice, today, the performance observed of transparent cache in Orange affiliate networks is about 30% of traffic saved upstream of the cache, concerning in particular OTT video, and the figure rises to 40% for IPTV. This scenario should multiply the number of storage sites and the total volume of stored data. Today, based on NGPoP solution improved by Orange, we have only estimation of value of energy consumption for storing data in a cloud. Nevertheless, most of energy used in delivering contents is consumed when downloading the video and in both scenario (SOTA and Edge Cloud) the number of downloading will be the same. So, in this analysis we neglect the difference between both scenarios taking in to account power consumption in the cloud.

Supposing that globally 30% of the traffic is saved (all services), this may have an impact on the dimensioning and topology of the core packet network. Due to modularity of transport systems, the impact on the network dimensioning is not exactly linear, but due to the high volume of traffic impacted it should tend nearby a linear trend. As we are looking for an order of magnitude in energy saving, we suppose that decreasing by 30% the traffic volume in the core network induces a decrease of same ratio in network dimensioning and consequently a decrease of 30% in energy consumption in the core IP network. This corresponds to a decrease of 30% for OTT videos and to a specific decrease of 40% for IPTV more impacted by caching.

Considering these possible savings, the energy to download 1 Gigabyte of data in the IP core network is given by the Table 4:

network element	variable	energy consumption to download 1 Gbyte Wh
IP core network	Conso1GBCoreIP for IPTV	11
IP core network	Conso1GBCoreIP for OTT	9

**Table 4 Basic energy consumption for 1 GByte downloaded with an edge cloud architecture**

Energy consumption for an average Gigabyte of video becomes:

IPTV:

Conso1GBNetwork = 73.2 Wh

OTT:

Conso1GBNetwork = 77.2 Wh

Energy consumption due to the network for an average video is :

IPTV:

ConsoVideoNetwork = 50.3 Wh.


OTT:



ConsoVideoNetwork = 39.6 Wh.

**5.3.2 SDN/NFV**

The SDN/NFV architecture applied to router control should allow optimizing the network transport resources by switching off routers when the network is under loaded outside of the busy period. Figure 2 gives the trend of the daily data traffic profile in the IP core network of Orange France. The carried volume of traffic is under 2/3 of the volume reached at the busy period at least during 12 hours during the day, half of the volume of the busy period during 10 hours, 1/3 of the volume of the busy period during 5 hours. We suppose that during this period of time, by reconfiguring the network, we are able to switch off equipment until 2/3 of the core IP systems (no more due to problems of connectivity within the network), linearly with the decrease of traffic, what consequently leads to a 30% saving of energy consumed in IP transport network during the day.

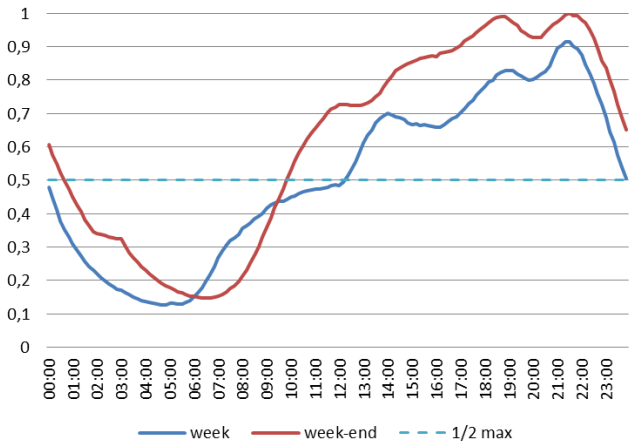

**Figure 2 - Daily profile of traffic in the IP core network**

Considering these possible savings, the consumption of energy to download 1 Gigabyte of data in the IP core network is given by Table 5:

network element	variable	energy consumption to download 1 Gbyte Wh
IP core network	Conso1GBCoreIP for <b>IPTV</b>	11
IP core network	Conso1GBCoreIP for <b>OTT</b>	9

**Table 5 Basic energy consumption for 1 GByte downloaded with a SDN/NFV architecture**

Energy consumption for an average Gigabyte of video becomes:

IPTV:  
                   Conso1GBNetwork = 71.7 Wh  
 OTT:  
                   Conso1GBNetwork = 75.6 Wh

Energy consumption due to the network for an average video is :

IPTV:  
                   ConsoVideoNetwork = 49.3 Wh.

OTT:  
 ConsoVideoNetwork = 38.7 Wh

### 5.3.3 Content distribution architecture

It is considered that the CDN has the same impact on power consumption as the edge cloud architecture. We suppose CDN are located in the same place where edge cloud could be deployed. For IPTV and OTT service the role of edge cloud and CDN will be exactly the same: to store the video closer to the saving carrying data in the core network.

### 5.3.4 Cumulative improvements for networks

Note that the impacts of introducing the new network architectures (edge cloud or CDN and SDN/NFV) are cumulative. By introducing simultaneously an edge cloud architecture or a content distribution architecture and an SDN/NFV architecture, the energy consumption to download 1 Gigabyte of data in the IP core network becomes:

network element	variable	energy consumption to download 1 Gbyte Wh
IP core network	Conso1GBCoreIP for IPTV	8
IP core network	Conso1GBCoreIP for OTT	6

**Table 6 Basic energy consumption for 1 GByte downloaded when cumulating edge cloud and SDN/NFV architectures**

Energy consumption for an average Gigabyte of video becomes:

IPTV:  
 Conso1GBNetwork = 69.8 Wh  
 OTT:  
 Conso1GBNetwork = 74.5 Wh

Energy consumption due to the network for an average video becomes:

IPTV:  
 ConsoVideoNetwork = 48.0 Wh.  
 OTT:  
 ConsoVideoNetwork = 38.2 Wh.

## 5.4 Global evaluation of potential savings

The average energy consumption of an average IPTV is illustrated in Table 7 and for OTT in Table 8 the SOTA scenario and for the various improvements proposed by CONVINCe on network (including SDN/NFV (with GLB) and CDN with NGPoP solution (cloud) and on terminals. Results are given with components for each one of the end to end segments (terminals, network and headend), for 1 hour of video (Conso-1hour) and for an average video (Conso\_Video) as defined in section 3.1.

Applying all CONVINCe proposals together for network and for terminals will lead to a 13% decrease of energy consumption in the end to end chain for IPTV and to a 14% decrease for OTT. Note that most of this energy consumption comes from the terminals (50%), 49% comes from the network and the energy consumption in headends is relatively insignificant (1%).

The difference in energy consumption between one hour of IPTV and one hour of OTT (higher for IPTV) is mainly due to the difference in volume of data needed to encode the video (significantly higher for IPTV). IPTV more often uses television sets which consume more energy than mobile devices. However, OTT more often use the mobile access network which consumes more than the wireline access.

Relative savings from terminals are eventually limited (17% for IPTV and 25% for OTT). Most of the savings in the network (9% for IPTV and 6% for OTT) comes from the core network which remains 2<sup>nd</sup> order compared to wired and wireless accesses.

	SOTA	Network improvements		terminal improvements ~17% on terminals	All
		including SDN/NFV	including CDN		
<b>Conso_Video</b>	<b>107,3 Wh</b>	<b>104,0 Wh</b>	<b>105,0 Wh</b>	<b>98,2 Wh</b>	<b>93,6 Wh</b>
Conso_Terminal	54,7 Wh			45,6 Wh	45,6 Wh
Conso_Network	52,6 Wh	49,3 Wh	50,3 Wh		48,0 Wh
Conso_HeadEnd	0,00 Wh				0,00 Wh

**Table 7 Average consumption of energy of an IPTV service with NGPoP**

	SOTA	Network improvements		terminal improvements ~25% on terminals	All
		including SDN/NFV	including CDN		
<b>Conso_Video</b>	<b>67,6 Wh</b>	<b>65,5 Wh</b>	<b>66,4 Wh</b>	<b>60,9 Wh</b>	<b>58,2 Wh</b>
Conso_Terminal	26,7 Wh			20,0 Wh	20,0 Wh
Conso_Network	40,8 Wh	38,7 Wh	39,6 Wh		38,2 Wh
Conso_HeadEnd	0,08 Wh				0,08 Wh

**Table 8 Average consumption of energy of an OTT service with NGPoP**

## 6 ECONOMIC MODEL: HOW TO PASS FROM ENERGY TO EUROS

The objective of this section is to quantify the economic gain realized when results of the CONVINcE project will be implemented. A European perimeter integrating the main European countries was selected.

From an estimation of IPTV and OTT downloaded per country, we aim at estimating the corresponding savings in terms of energy. Considering the average cost of energy per country, we deduce savings in term of cost, per country, and globally.

For the number of videos considered, the approach was the following. Assumptions about the number of IPTV and OTT was made for France, as Orange had the best statistics for this country. Figures were then extrapolated to other European countries, using demographics and standard of living indicators.

Average earnings in energy by video are assumed to have the same order of magnitude for all the concerned countries. We consider applying altogether the propositions of CONVINcE project, as evaluated in section 5.4 of this document.

Cost of energy was derived from public sources accessible on the Internet.

### 6.1 Calculation of forecast of volume of IPTV and OTT per country

We suppose IPTV represent 10% and OTT 80% of the total traffic in the core network of Orange France. Supposing that Orange France has 40% of the market share, the number of IPTV calculated for France is in the order of scale of  $4.4 \times 10^9$  videos in 2018 and the number of OTT videos  $96,1 \times 10^9$  videos

The total consumption of videos in other countries is supposed to be proportional to the population and proportional to the "purchasing power parities" factor representing the standard of living within the country (figures from OECD). Results of this calculation are given in Table 9.

country	population	Purchasing Power Parities	weighting factor	number of video IPTV (Giga)	number of video OTT (Giga)
Germany	81 174 000	115	1,41	6,2	66,51
France	66 352 469	100	1,00	4,4	47,27
United Kingdom	64 767 115	103	1,01	4,4	47,53
Italy	60 795 612	89	0,82	3,6	38,55
Spain	46 439 864	87	0,61	2,7	28,79
Poland	38 005 614	63	0,36	1,6	17,06
Netherlands	16 900 726	122	0,31	1,4	14,69
Belgium	11 258 434	109	0,18	0,81	8,74
Greece	10 812 467	66	0,11	0,47	5,08
Czech Republic	10 538 275	76	0,12	0,53	5,71
Portugal	10 374 822	71	0,11	0,49	5,25
Hungary	9 849 000	63	0,09	0,41	4,42
Sweden	9 747 355	118	0,17	0,76	8,19
Austria	8 584 926	117	0,15	0,67	7,16
Denmark	5 659 715	114	0,10	0,43	4,60
Finland	5 471 753	103	0,08	0,37	4,02
Slovakia	5 421 349	72	0,06	0,26	2,78
Ireland	4 625 885	129	0,09	0,40	4,25
Total	466 779 381			30	321

**Table 9 Elements of calculation of number of IPTV and OTT per country**

### 6.1.1 Consumption of energy in the Edge Cloud. Case for the France

Based on volume downloaded in the Network, we estimated the consumption of energy for 1 Gbyte downloaded in the cloud for IPTV and OTT.

consumption energy	23 833 MWh
volume OTT	134 020 Gbyte
volume IPTV	30 284 Gbyte
volume total	164 304 Gbyte
consumption energy OTT	19 440 MWh
consumption energy IPTV	4 393 MWh
consumption 1Gbyte downloaded OTT	1,63 Wh
consumption 1Gbyte downloaded IPTV	1,451 Wh

**Table 10 Volume and power consumption of the IPTV and OTT stored in the cloud**

## 6.2 Cost of energy per country

The objective is to take into account the difference of cost of energy possibly variable in the different countries in Europe.

A difficulty arises when defining the cost/price of energy. Energy in the end to end chain will be consumed by various actors: companies like operators, domestic customers, ..., with different tariffs corresponding to the different market segments. Moreover the price of energy includes a number of taxes, depending on the market segment.

For these economic assessments of energy, we evaluated two aspects of the problem:

- Economic savings in terms of costs of energy and supply (column "estimation cost of energy" and "economic savings Convince" in Table 11 for IPTV and Table 12 for OTT).
- The total savings in terms of fee for energy to pay by all participants within the chain: enterprises for content delivery and network, final consumer for terminals (columns "price of energy ..." in Table 13 for IPTV and Table 14 for OTT).

Values used in these evaluations are extracted from European statistics (Eurostat website and more specifically <http://ec.europa.eu/eurostat/web/energy/data/database> ).

### 6.2.1 Analyse of the impact on the cost of energy (purchase, production and distribution)

Unfortunately, on the Internet, we can easily find prices of energy addressed to different classes of customers, but costs of production are not so easily available. We suppose that wholesale prices of energy and supply for the highest volume of energy without any taxes are nearer from production cost. Evaluated basic cost of energy can be found in column "estimation of costs of energy". They refer in Eurostat prices of energy and supply for the greatest volumes.

Except some specific countries, the value of a kWh ranges from 4 cents of euro to 9 cents.

country	number of video (Giga)	savings energy convince MWh	estimation cost of energy (€/kWh) 2020	economic Savings convince M€
Germany	6,2	84 889	0,064	5,44
France	4,4	60 338	0,052	3,15
United Kingdom	4,4	60 664	0,101	6,12
Italy	3,6	49 204	0,094	4,65
Spain	2,7	36 741	0,089	3,26
Poland	1,6	21 773	0,053	1,14
Netherlands	1,4	18 750	0,060	1,12
Belgium	0,8	11 159	0,063	0,71
Greece	0,5	6 489	0,071	0,46
Czech Republic	0,5	7 283	0,051	0,37
Portugal	0,5	6 698	0,066	0,44
Hungary	0,4	5 642	0,069	0,39
Sweden	0,8	10 459	0,051	0,53
Austria	0,7	9 134	0,057	0,52
Denmark	0,4	5 867	0,085	0,50
Finland	0,4	5 125	0,052	0,27
Slovakia	0,3	3 550	0,053	0,19
Ireland	0,4	5 427	0,067	0,37
Total	30	409 193		30

**Table 11 Economic savings in terms of costs of energy and supply for IPTV**

country	number of video (Giga)	savings energy convince MWh	estimation cost of energy (€/kWh) 2020	economic Savings convince M€
Germany	66,5	621 077	0,064	39,80
France	47,3	441 456	0,052	23,04
United Kingdom	47,5	443 836	0,101	44,79
Italy	38,5	359 992	0,094	34,00
Spain	28,8	268 807	0,089	23,84
Poland	17,1	159 301	0,053	8,37
Netherlands	14,7	137 182	0,060	8,17
Belgium	8,7	81 646	0,063	5,16
Greece	5,1	47 479	0,071	3,36
Czech Republic	5,7	53 286	0,051	2,71
Portugal	5,2	49 008	0,066	3,25
Hungary	4,4	41 282	0,069	2,83
Sweden	8,2	76 524	0,051	3,88
Austria	7,2	66 827	0,057	3,82
Denmark	4,6	42 927	0,085	3,66
Finland	4,0	37 497	0,052	1,94
Slovakia	2,8	25 970	0,053	1,37
Ireland	4,3	39 702	0,067	2,67
Total	321	2 993 800		217

**Table 12 Economic savings in terms of costs of energy and supply for OTT**

### 6.2.2 Cumulated savings for all actors within the chain

The prices involved in the evaluation of the amount of money paid by the energy consumer in the chain include the prices of energy, of network and taxes (they correspond to what the customer pays for its energy). Values used in this evaluation refer to electricity prices for domestic for terminals and industrial customers for network and headends. Corresponding values can be found respectively in columns "price of energy households" and "price of energy enterprises" of Table 13. Note the price for household customers is significantly higher than the price for enterprises. The order of scale is more than 2 times the costs of production.

### 6.3 The project's economic assessment

Taking into account these energy costs and the forecast volume per country for the year 2020 (we may consider this an order of size of the saving per year), we obtain the energy savings in Table 13 for IPTV and in Table 14 for OTT (column "savings energy convince" for the savings in MWh, and column "savings network + headends" and "savings terminals" for the savings in energy price for the energy consumption in the whole end to end chain within the cloud).

In both cases, the total energy savings at the scope of the main European countries is some tens of millions of euros for IPTV and in a few hundred millions euros for OTT, which is little compared to the energy consumption of network operators in Europe.

The assumptions taken for this analysis (IPTV and OTT in the global traffic, consumption of energy of the elements of the chain) have been chosen to give upper bounds to the energy savings.

In our methodology, results or measurements obtained for one operator have been generalized to others operators in other countries. The objective of these calculations is to give an order of scale about possible savings and not a precise evaluation. We develop our methodology after comparing the evaluation of pricing costs of data gigabyte in various European affiliate of the Orange group. The range of value is in a ratio less than 5, mainly depending of the usage of traffic. We made the assumption that the trend should be similar for the consumption of energy per gigabyte as for the cost.

These methodology may thus induce errors of evaluation let say in a ratio until 5 times more. Suppose thus the energy savings 5 times higher, the final trend of the evaluation remains unchanged: the economy of energy related to the service IPTV and OTT is small compared to the total energy consumed by networks and terminals.

country	number of video (Giga)	savings energy convince MWh	price of energy households 2020	price of energy enterprises 2020	savings network + head-ends	savings terminals
Germany	6,2	84 889	0,2976	0,1811	5,12	16,85
France	4,4	60 338	0,1661	0,1208	2,43	6,68
United Kingdom	4,4	60 664	0,2423	0,1787	3,61	9,80
Italy	3,6	49 204	0,2672	0,1930	3,16	8,77
Spain	2,7	36 741	0,2290	0,1408	1,72	5,61
Poland	1,6	21 773	0,1409	0,1058	0,77	2,05
Netherlands	1,4	18 750	0,1940	0,1097	0,68	2,43
Belgium	0,8	11 159	0,2407	0,1290	0,48	1,79
Greece	0,5	6 489	0,1877	0,1550	0,33	0,81
Czech Republic	0,5	7 283	0,1261	0,0926	0,22	0,61
Portugal	0,5	6 698	0,2227	0,1368	0,31	1,00
Hungary	0,4	5 642	0,1064	0,1040	0,20	0,40
Sweden	0,8	10 459	0,1777	0,0746	0,26	1,24
Austria	0,7	9 134	0,2009	0,1247	0,38	1,22
Denmark	0,4	5 867	0,2945	0,1079	0,21	1,15
Finland	0,4	5 125	0,1502	0,0848	0,14	0,51
Slovakia	0,3	3 550	0,1506	0,1351	0,16	0,36
Ireland	0,4	5 427	0,2564	0,1700	0,31	0,93
Total	30	409 193			20	62
					83	

**Table 13 The total savings in terms of fee for energy for IPTV per year (energy and euro)**

country	number of video (Giga)	savings energy convince MWh	price of energy households 2020	price of energy enterprises 2020	savings network + head-ends	savings terminals
Germany	66,5	621 077	0,2976	0,1811	31,50	133,06
France	47,3	441 456	0,1661	0,1208	14,94	52,78
United Kingdom	47,5	443 836	0,2423	0,1787	22,22	77,41
Italy	38,5	359 992	0,2672	0,1930	19,46	69,25
Spain	28,8	268 807	0,2290	0,1408	10,60	44,31
Poland	17,1	159 301	0,1409	0,1058	4,72	16,16
Netherlands	14,7	137 182	0,1940	0,1097	4,21	19,16
Belgium	8,7	81 646	0,2407	0,1290	2,95	14,15
Greece	5,1	47 479	0,1877	0,1550	2,06	6,41
Czech Republic	5,7	53 286	0,1261	0,0926	1,38	4,84
Portugal	5,2	49 008	0,2227	0,1368	1,88	7,86
Hungary	4,4	41 282	0,1064	0,1040	1,20	3,16
Sweden	8,2	76 524	0,1777	0,0746	1,60	9,79
Austria	7,2	66 827	0,2009	0,1247	2,33	9,66
Denmark	4,6	42 927	0,2945	0,1079	1,30	9,10
Finland	4,0	37 497	0,1502	0,0848	0,89	4,06
Slovakia	2,8	25 970	0,1506	0,1351	0,98	2,82
Ireland	4,3	39 702	0,2564	0,1700	1,89	7,33
Total	321	2 993 800			126	491
					617	

**Table 14 The total savings in terms of fee for energy for OTT per year (energy and euro)**

CONVINcE confidential

## 7 CONCLUSION

Savings that could be obtained by the CONVINCe project for IPTV and OTT service remain small. We took in to account cloud (NGPoP solution) where we defined and included cost of energy of the cloud. We can only obtain savings in order of magnitude of some hundreds of millions of Euros per year in Europe. In regards to the energy expenses of all participants (video service sellers and users) we obtained 83M€ for IPTV (Table 13) and 617M€ for OTT (Table 14) savings. However, at the level of the service, it represents about 13% for IPTV and 14% for OTT savings for the delivery of the service which is not negligible for the stakeholders.

Achieved result are smaller to those from D.1.2.2 (3% for IPTV and 6% for OTT) but it not means cloud is not a good direction. Cloud helps the operators to reduce volume of traffic in the higher layers of the network (savings on future investment in the network capacity) and to decrease fees for international traffic. Cost of energy in the cloud integrated in the model made result more close to reality.

The energy consumption for IPTV and OTT service is a small portion of the total energy that operators use in their networks. But nowadays is very hard to reach spectacular savings. Operators are looking for even small cost cutting opportunities.